

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

This Page Blank (uspto)



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 11/04, H04L 12/64</b>	<b>A1</b>	(11) International Publication Number: <b>WO 95/32596</b> (43) International Publication Date: 30 November 1995 (30.11.95)
--	-----------	---

(21) International Application Number: PCT/GB95/01133

(22) International Filing Date: 19 May 1995 (19.05.95)

(30) Priority Data:  
9410295.1 21 May 1994 (21.05.94) GB

(71) Applicant (for all designated States except US): NORTHERN TELECOM LIMITED [CA/CA]; World Trade Center of Montreal, 8th floor, 380 St Antoine Street West, Montreal, Quebec H2Y 3Y4 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BRUECKHEIMER, Simon, Daniel [GB/GB]; 204 Victoria Road, London N22 4XQ (GB). MAUGER, Roy, Harold [GB/GB]; 67a Parsonage Gardens, Enfield, Middx. EN2 67R (GB).

(74) Agent: RYAN, John, Peter, William; Nortel Limited, Patents and Licensing, West Road, Harlow, Essex CM20 2SH (GB).


(81) Designated States: JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

(54) Title: ATM ACCESS SYSTEM

## Example Implementation using an ATM PON

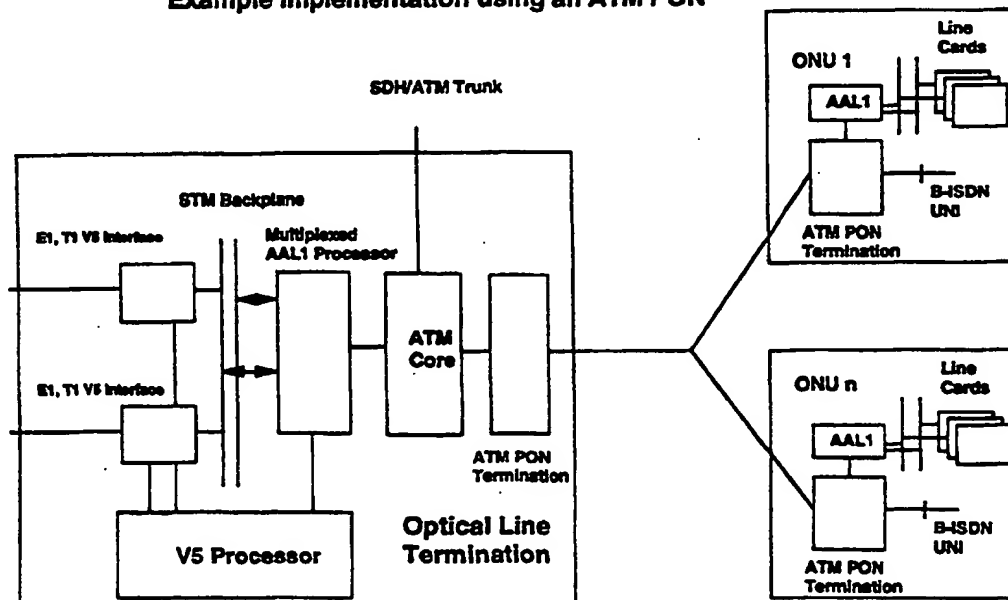

(57) Abstract

An integrated broadband and narrowband access arrangement, includes a multiplexed ATM adapter and an ATM core. The ATM core terminates a broadband access system and a narrowband access system whereby to deliver ATM cells to a SDH/ATM trunk or to the adapter. The services comprising the narrowband system are terminated each by a respective adapter providing an individual virtual circuit connection to the multiplexed adapter. The narrowband services within that virtual circuit having permanently assigned time slots whereby to retain time slot sequence integrity throughout the adaptation process.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## ATM ACCESS SYSTEM

This invention relates to digital communications systems and in particular to systems embodying asynchronous transfer mode (ATM) technology.

- 5 The asynchronous transfer mode (ATM) technology is a flexible form of transmission which allows any type of service traffic, voice, video or data, to be multiplexed together on to a common means of transmission. In order for this to be realised, the service traffic must first be adapted typically into 53 byte cells comprising 5 byte headers and 48 byte payloads such that the original traffic can be reconstituted at the far end of
- 10 an ATM network. This form of adaptation is performed in the ATM adaptation layer (AAL). Five types of adaptation layer have been defined. This invention relates to adaptation layer 1 which is used to adapt constant bit rate traffic to the ATM standard.
- 15 An ATM exchange may support POTS or ISDN services as well as B-ISDN services. The H320 Video conference standard is a typical user of an nx64Kb/s service, this may well be embedded within a B-ISDN workstation and can also be supported by the N-ISDN. In an ATM exchange with 2Mb/s trunk circuits with independent calls on each 64kb/s
- 20 channel it is desirable that traffic once adapted to ATM should remain in ATM up to the destination narrowband port. It is further desirable that a physical trunk at e.g. 155Mb/s should be able to carry logical routes to more than one destination as 155Mb/s is generally too large a capacity for trunking within a narrowband service network. If the logical routes are of
- 25 nx64kb/s where  $n \geq 6$  then the cell assembly delay is reduced to the point that echo cancellation is no longer necessary. The cell assembly delay of a single 64kb/s circuit is 6 msec which requires echo cancellation for interworking with the existing narrowband network.

-2-

According to the present invention there is provided an asynchronous transfer mode (ATM) processor adapted to terminate a broadband access system and deliver ATM cells to a SDH/ATM trunk on to a multiplexed AAL1 processor.

According to the invention there is further provided an integrated broadband and narrowband access arrangement, including a multiplexed ATM adapter, an ATM core associated with the multiplexed adapter, wherein the ATM core terminates a broadband access system and a narrowband access system whereby to deliver ATM cells to a SDH/ATM trunk or to the adapter, wherein the services comprising the narrowband system are terminated each by a respective adapter providing an individual virtual circuit connection to the multiplexed adapter, the narrowband services within that virtual circuit having permanently assigned timeslots whereby to retain timeslot sequence integrity throughout the adaptation process.

According to another aspect of the invention there is provided a method of transmitting traffic in an integrated broadband and narrowband access arrangement comprising a multiplexed ATM adapter and an ATM core associated with the multiplexed adapter, wherein the ATM core terminates a broadband access system and a narrowband access system whereby to deliver ATM cells to a SDH/ATM trunk or to the adapter, the method including terminating the services comprising the narrowband system each by a respective adapter providing an individual virtual circuit connection to the multiplexed adapter, and providing the narrowband services within that virtual circuit with permanently assigned timeslots whereby to retain timeslot sequence integrity throughout the adaptation process.

Our co-pending United Kingdom application No 9410294.4 S D Brueckheimer, R H Mauger 7-6) of even date relates to a flexible implementation of ATM adaptation layer 1. The present invention relates to the use of a multiplexed AAL1 adapter to enhance a flexible access

-3-

system so that it can import both broadband and narrowband services in a flexible manner. In this context narrowband is understood to include services that are provided in a synchronous transfer mode (STM), typically channelled at 64Kbit/sec, and broadband is understood to cover services which are provided by the asynchronous transfer mode (ATM). The bandwidths of the two services may overlap.

An embodiment of the invention will now be described with reference to the accompanying drawings in which:-

- Fig. 1 is a schematic diagram of a flexible AAL1 processor.  
Fig. 2 is a block schematic diagram of the processor of Fig. 1.  
Fig. 3 is a schematic diagram of a multiplexed ATM adapter according to the invention.  
Fig. 4 illustrates an implementation of the system of Fig. 3 using an ATM passive optical network; and  
Fig. 5 illustrates the interworking of individual AAL1 adapters and the multiplexed adaptater of Fig. 3.

20

Figs 1 and 2 together provide an illustration of the AAL1 implementation.

In a typical narrowband telecommunications system a common STM bus is available on the backplane of the equipment. This is used as the interface between the equipment which adapts external interfaces such as Analogue or ISDN lines and the equipment which performs the intrinsic function such as switching. An equipment which adapts to an external STM1 system would typically have 2048 64Kb/s channels available on the backplane to the adaptation function. The purpose of the equipment is to allow the adaptation of a number of 64Kb/s channels say 2048 into a number of nx64Kb/s ATM virtual circuits and the readaptation to 64Kb/s channels within the following constraints.

35

- Any 64Kb/s channels can be associated with any ATM virtual circuit.

-4-

- Any group of P 64 Kb/s channels can be assembled together as part or whole of an ATM virtual circuit and will maintain timeslot sequence integrity through the adaptation and transmission processes.
  - For conformance to AAL1 standards n is restricted to values from 1 to 30 for proprietary applications n can have any value up to the full capacity of the system.
  - The number of ATM virtual circuits m can be any value up to the limit of 1 64 Kb/s circuit per ATM VC i.e.  $1 \leq M \leq 2048$  for this example.
- The principle of the mechanism is illustrated in figure 1 and the functional block diagram of its implementation is illustrated in figure 2. In both diagrams a process is implied, but not shown, which runs at e.g. 125 microsecond intervals and staticises the STM stream on the backplane into an egress frame memory and takes the contents of an Ingress frame memory and distributes this as an STM stream to the backplane. The mechanism is controlled by a chain structure. Each link in the chain is embodied as a combination of two bi-directional pointers and an address in the egress or ingress frame memory, there is one link for each 64 Kb/s channel in each of the egress and ingress chains. Chains are linked to headers and there is one header for each potential nx64Kb/s ATM virtual circuit, headers are embodied by the association of a channel count for control purposes, a VC identity for cell assembly purposes and a bi-directional pointer to the first link of the chain. A chain is assembled for each active ATM virtual circuit and consists of a number of links which use bi-directional pointers to point upwards to the header or previous link and downwards to the next link. Each link contains the address in the frame memory of the required frame sample; links which have not been allocated are formed into a chain which is formed under a special FREE header. Separate egress and ingress chain processes are initiated each 125 microsecond cycle. These process each chain in turn and each link in the



-5-

chain in turn and deliver an address to the voice memory and a VPI/VCI to a cell assembly or disassembly process. For the cell assembly process the frame samples are read at each address and change and placed in the next available byte position within the cell payload. Filled cells are assembled with their ATM Header and AAL1 SAT-PDU header and launched into the ATM. A new cell is then generated for that virtual circuit.

For the cell disassembly process cells are unpacked a byte at a time and frame samples are written to the ingress frame memory according to the address delivered by the ingress chain processor, on receipt of an indication from the AAL1 of the boundary of an nx64 Kb/s frame. The cell disassembly process then checks for phase synchronism between egress and ingress functions. The chains are updated under control of a chain update processor under instructions from the system control (not shown). The chain update processor operates a request/grant mechanism with the chain processors to ensure that a chain is not being modified at the same time as it is being processed. If an independent 64 Kb/s channel is being modified then it can be inserted or deleted from any point in the chain. An insertion process uses a link from the FREE chain. A deletion process returns a link to the FREE chain. If a Px64 Kb/s service is being set up then the channels must be inserted in the correct order in consecutive links in the chain.

An embodiment of the invention is illustrated in Figure 3. The core of the system is an ATM processor which is able to terminate a broadband access system and deliver ATM cells to a SDH/ATM trunk or to a multiplexed AAL1 processor as described above. Broadband access systems may be based on ATM PONs fibre/coax hybrid networks or other well known access technologies. Attached to the broadband access system are one or more narrowband access systems which deliver services in a 64 Kb/s channelised mode. The interface between the narrowband access and broadband access is provided by an AAL1 adapter and in particular a nx64 Kb/s structured data transfer variant of AAL1. Narrowband access systems may be PONs, radio or other well

- known access technologies. The multiplexed AAL1 processor interfaces to an STM backplane to which are attached adaptation devices to channelised trunk systems such as the 2 Mb/s E1 trunk or the 1.5 Mb/s T1 trunk system. This arrangement provides flexible interworking of circuits within the narrowband access domain and channels within the external channelised trunks, this being achieved by the multiplexed AAL1 system providing an implicit grooming or cross-connection function.
- 10 An example implementation of the concept is illustrated in figure 4. This shows an ATM passive optical network (PON) as the broadband access system. The narrowband access system may be a collection of line cards providing narrowband services which are connected to a common STM backplane within the optical network unit (ONU) that houses the ATM
- 15 PON termination. An AAL1 adapter provides the interface between the STM backplane and the ATM PON termination. The arrangement described herein relates to the interworking between the individual AAL1 adapters in the ONUs and the multiplexed AAL1 adapter in the optical line termination. This interaction is illustrated in Figure 5. Each individual
- 20 AAL1 adapter in the ONUs has a separate virtual circuit connection to the multiplexed AAL1 adapter in the optical line termination. Within that virtual circuit, narrowband services connected in the ONUs are permanently assigned timeslots within the nx64 Kb/s AAL1 structure. These may be individual 64 Kb/s channels or Px64 Kb/s channels supporting timeslot sequence integrity. The channelised trunks are terminated in the standard manner and their channels are presented in permanently assigned positions on the STM backplane of the optical line termination. The operation of flexible access systems is standardised by two interface standards, the Q interface standard which allows the system to be
- 25 configured from a network management system and the V 5 interface which in the V 5.2 version allows channels connecting to a switch to be dynamically configured on a per call basis. This is implemented using eg the bearer channel connection protocol in V 5.2.
- 30

-7-

The multiplexed AAL1 adapter allows any channel within any virtual circuit to be connected to any channel on the backplane either under request from the Q interface or from the V 5.2 interface. It therefore emulates the operation of a cross-connect or a switch which is required in conventional implementations. With reference to figure 1, when a new ONU is configured by operation over the Q interface, then a virtual circuit is configured between the AAL1 adapter in the ONU and the multiplexed AAL1 adapter. This is embodied by establishing a new chain with a link for each configured channel at the ONU. At this point the channels on the channelised trunks have not been assigned so the links in the chain are populated with default addresses in the frame memory such that no connection takes place. As channels are assigned on the V 5 interface whether by the Q interface or the V 5.2 interface, then the default address in the chain links is updated to the real assigned address.

**CLAIMS:**

1. An integrated broadband and narrowband access arrangement, including a multiplexed ATM adapter, an ATM core associated with the multiplexed adapter, wherein the ATM core terminates a broadband access system and a narrowband access system whereby to deliver ATM cells to a SDH/ATM trunk or to the adapter, wherein the services comprising the narrowband system are terminated each by a respective adapter providing an individual virtual circuit connection to the multiplexed adapter, the narrowband services within that virtual circuit having permanently assigned timeslots whereby to retain timeslot sequence integrity throughout the adaptation process.
2. An integrated broadband and narrowband access arrangement as claimed in claim 1, wherein the narrowband system comprises a set of line cards coupled to a common STM backplane.
3. An integrated broadband and narrowband access arrangement as claimed in claim 2, wherein the multiplexed adapter allows any channel within any virtual circuit to be connected to any channel on the backplane.
4. An integrated broadband and narrowband access arrangement as claimed in claim 2 or 3, wherein the backplane incorporates an ingress and an egress memory, there being means for storing a synchronous transport mode (STM) stream into the egress frame memory, and means for distributing the content of the ingress frame memory as an STM stream.
5. An integrated broadband and narrowband access arrangement as claimed in claim 4, wherein the storing and distribution processes are controlled by a chain structure, each link in the chain comprising two bidirectional pointers and an address in the egress or ingress frame memory, there being one link per channel in each of the egress or ingress chains.

-9-


6. A method of transmitting traffic in an integrated broadband and narrowband access arrangement comprising a multiplexed ATM adapter and an ATM core associated with the multiplexed adapter, wherein the
- 5 ATM core terminates a broadband access system and a narrowband access system whereby to deliver ATM cells to a SDH/ATM trunk or to the adapter, the method including terminating the services comprising the narrowband system each by a respective adapter providing an individual virtual circuit connection to the multiplexed adapter, and providing the
- 10 narrowband services within that virtual circuit with permanently assigned timeslots whereby to retain timeslot sequence integrity throughout the adaptation process.
7. A method as claimed in claim 6, wherein the storing and
- 15 distribution processes are controlled by a chain structure, each link in the chain comprising two bidirectional pointers and an address in the egress or ingress frame memory, there being one link per channel in each of the egress or ingress chains.

20

1 / 5

## Flexible AAL1 Mechanism


figure 1

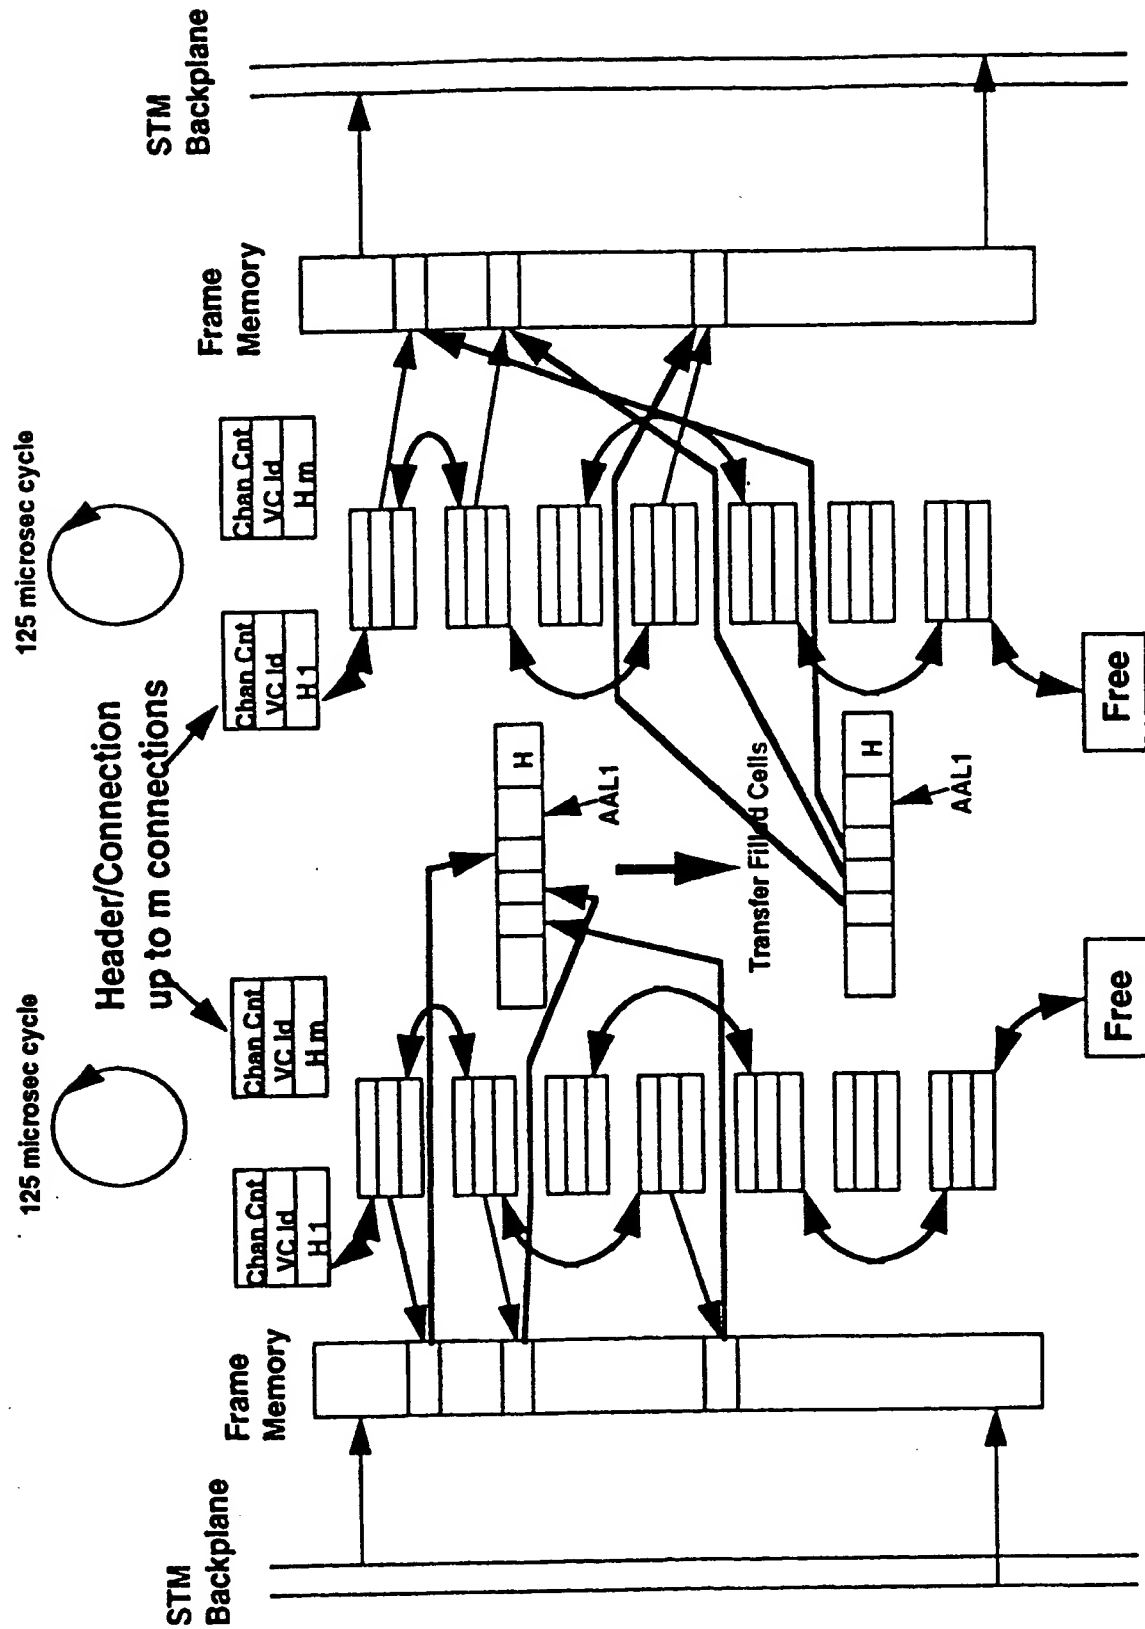

2 / 5

## Flexible AAL1 Functional Block Diagram


figure 2

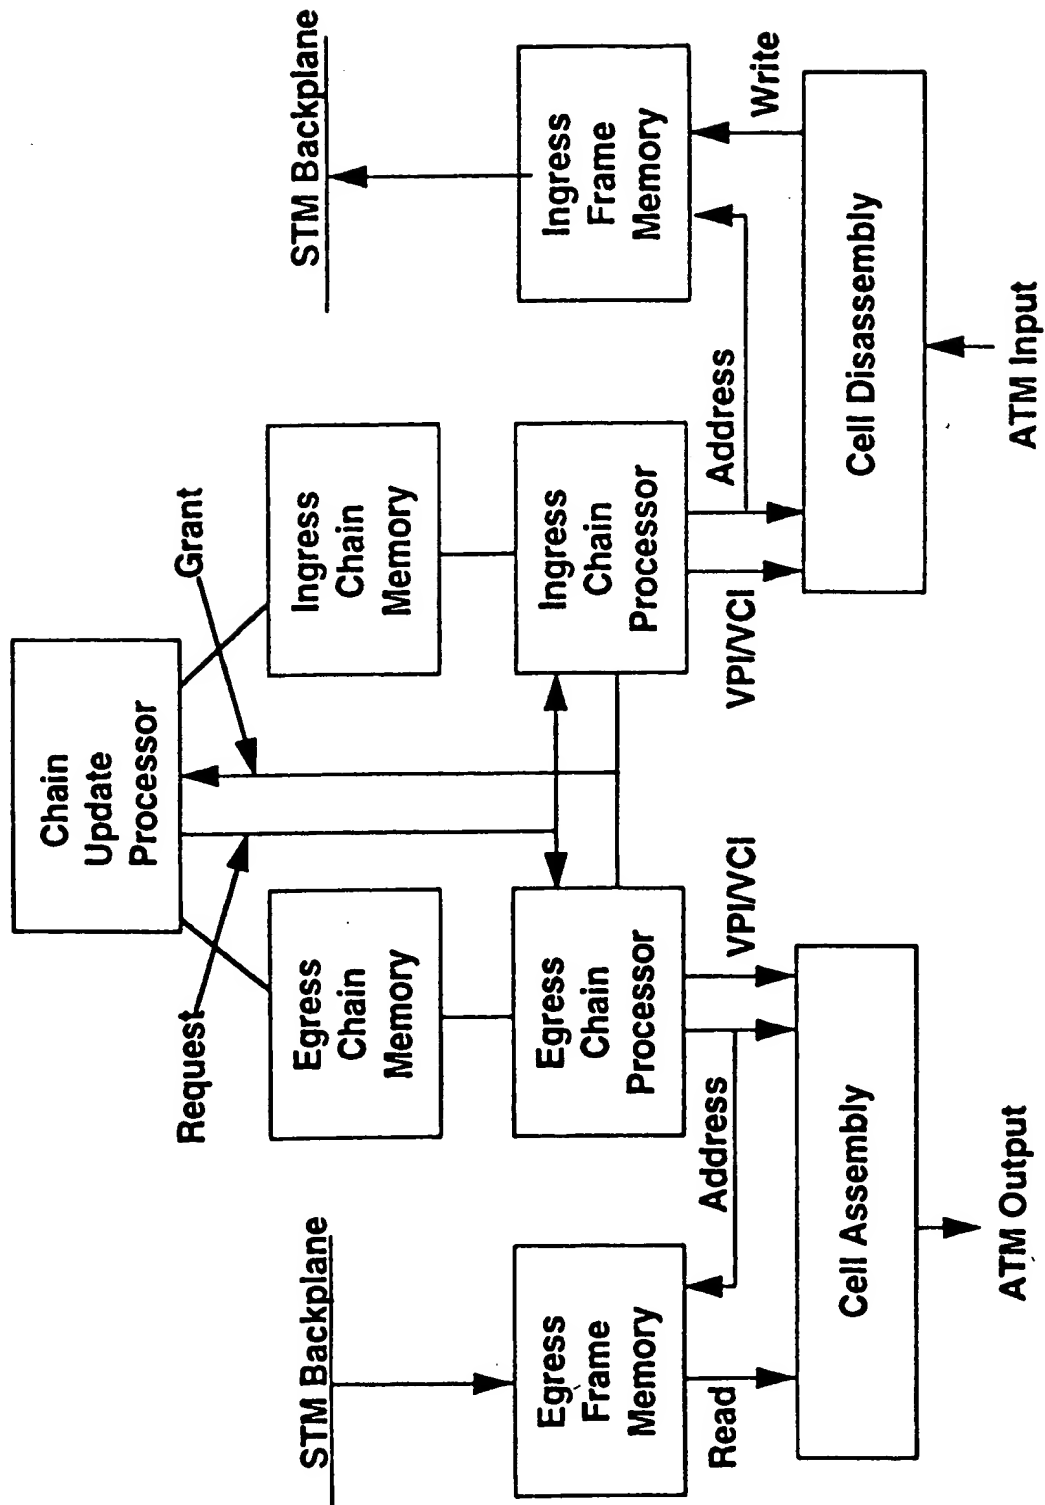

3 / 5

# Integrated Broadband and Narrowband Access

figure 3

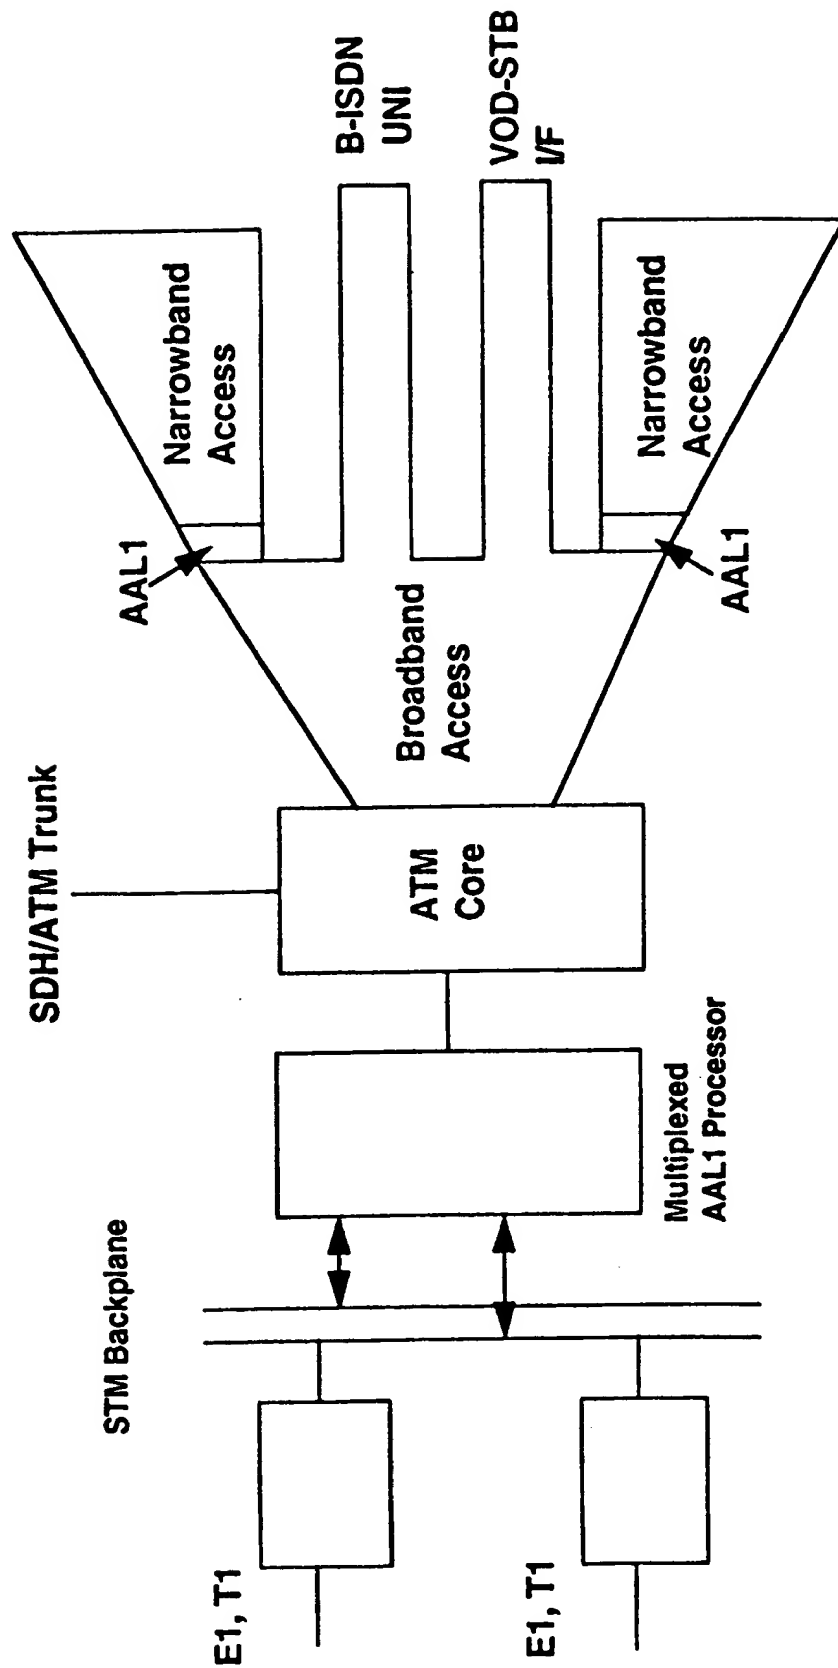


for access aggregates of 6 or more channels no echo control is required



4 / 5


# Example Implementation using an ATM PON

figure 4

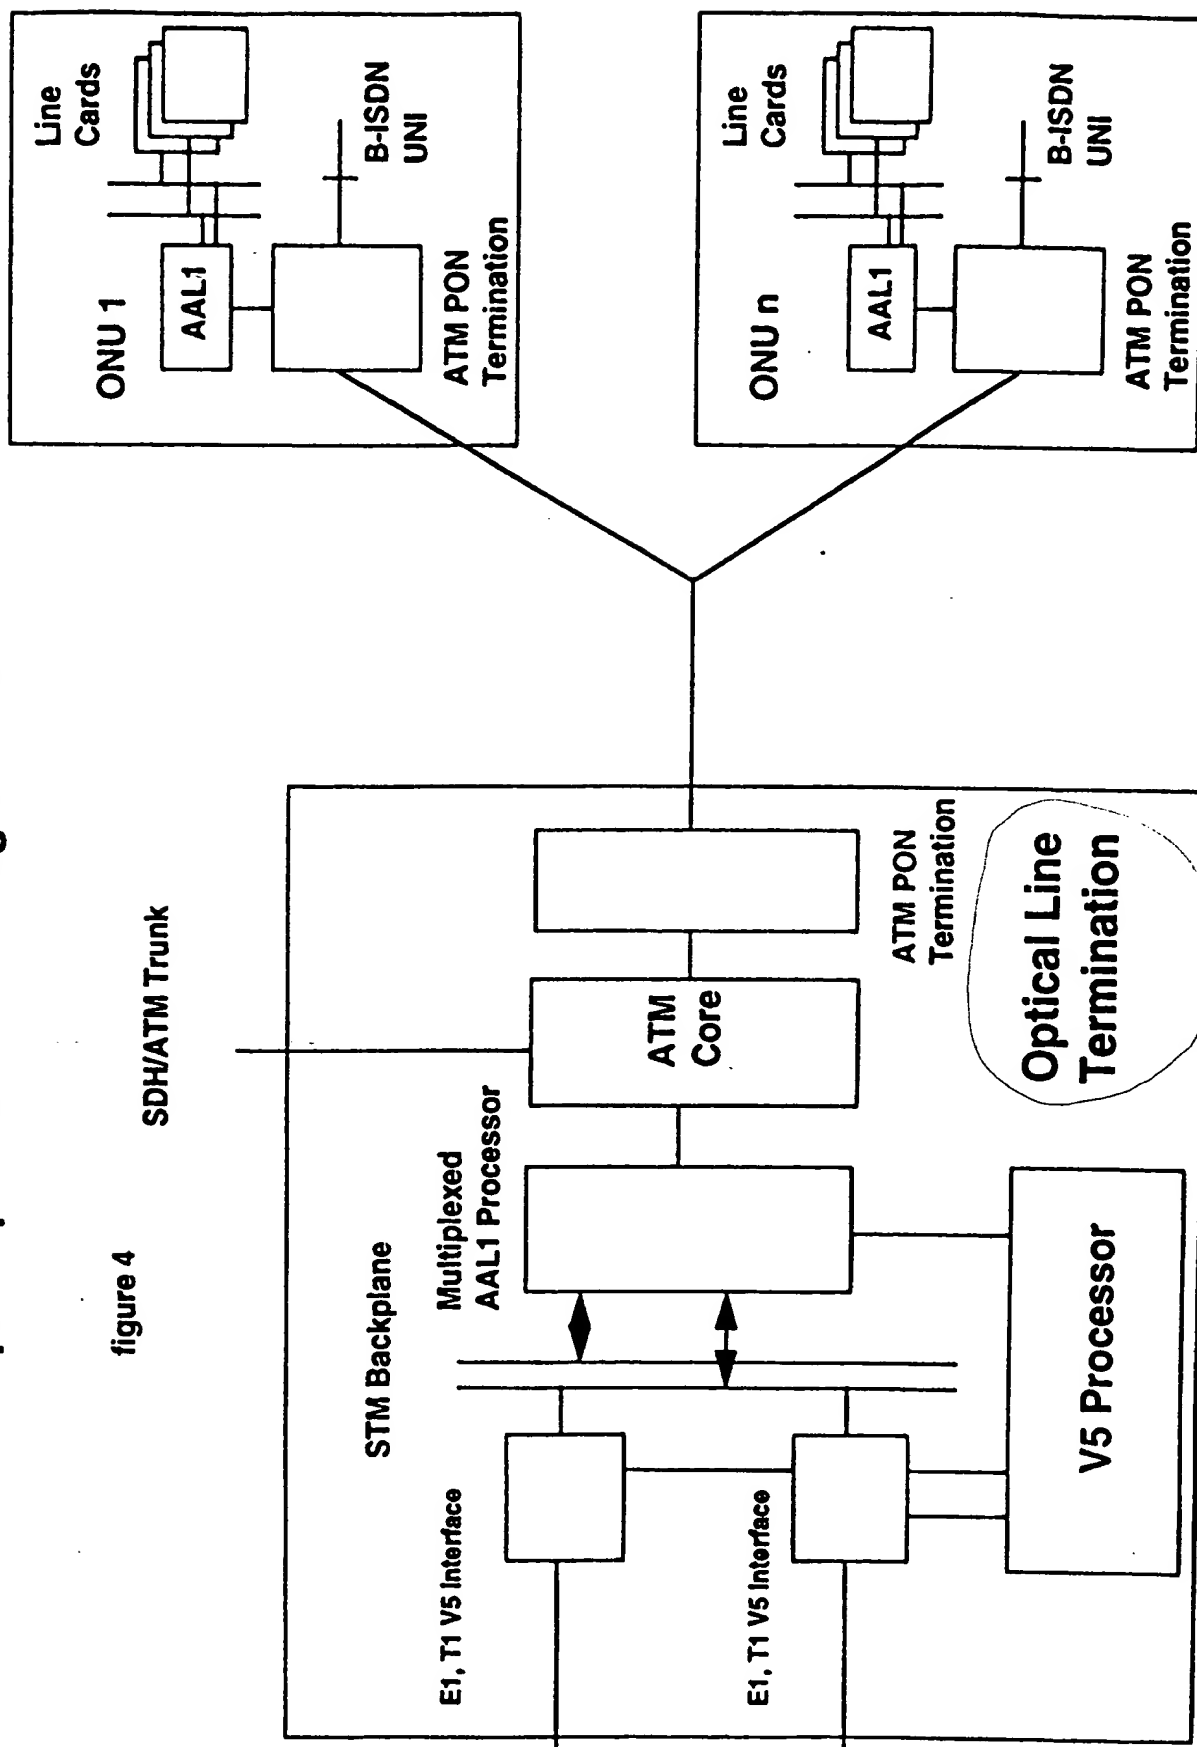

# Operation of V 5.1 and V5.2

figure 5

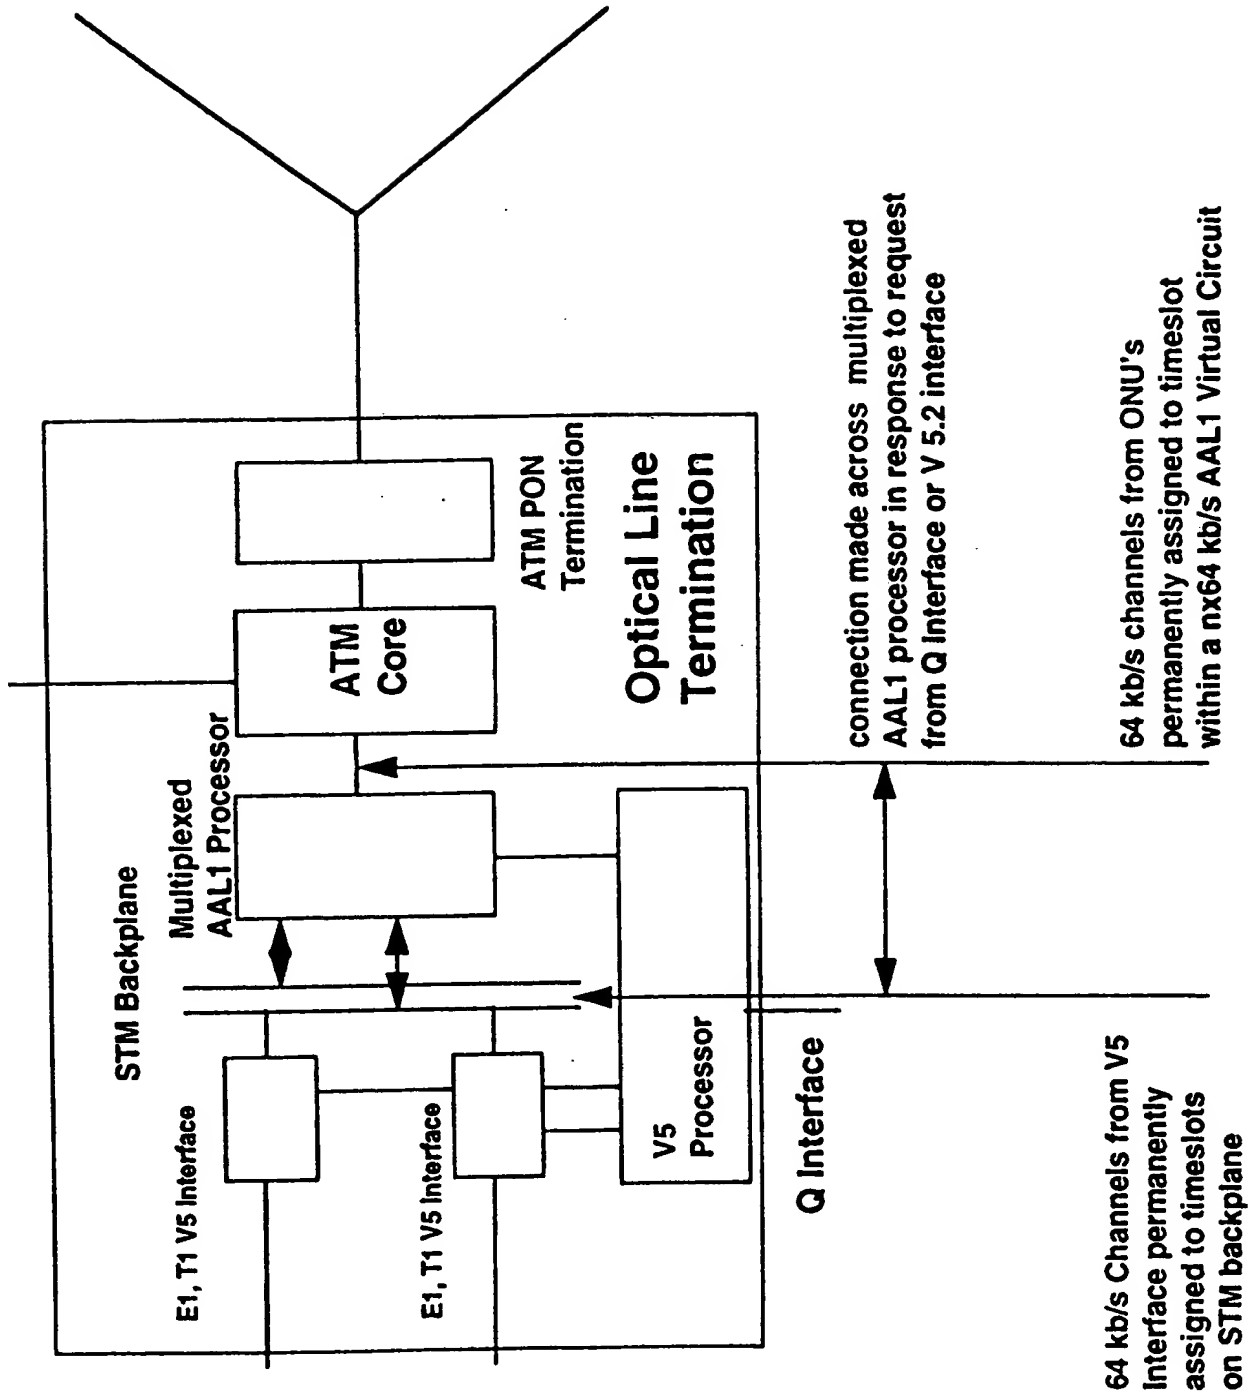

## INTERNATIONAL SEARCH REPORT

Intern al Application No

PCT/GB 95/01133

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H04Q11/04 H04L12/64

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO-A-92 22034 (THE TRUSTEES OF THE UNIVERSITY OF PENNSYLVANIA) 10 December 1992	1,2
A	see page 9, line 23 - page 10, line 22 see page 20, line 3 - line 6; figures 3B, 5	3-5
Y	EP-A-0 523 874 (AT&T) 20 January 1993 see column 2, line 31 - line 39 see column 2, line 58 - column 3, line 13 see column 4, line 58 - column 5, line 14 see column 9, line 1 - line 50	1,2

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

24 August 1995

Date of mailing of the international search report

01.09.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Pieper, T

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>INTERNATIONAL JOURNAL OF DIGITAL AND ANALOG COMMUNICATION SYSTEMS, vol. 6, no. 1, January 1993 UK, pages 3-14, ARMITAGE ET AL. ' Prototyping an ATM adaptation layer in a multimedia terminal ' see page 6, left column, line 17 - line 31 see page 9, left column, line 20 - right column, line 56; figures 1-4,6,11,13 ---</p>	1,5
A	<p>ICC'93, vol. 2, 23 May 1993 - 26 May 1993 GENEVA, CH, pages 873-877, XP 000371206 K. JAMES ET AL. 'TOWARDS A GLOBAL V5 INTERFACE' see page 875, right column, paragraph 2 - page 876, left column, paragraph 1; figures 5,6 ---</p>	1
A	<p>SPIE FIBER NETWORKS FOR VOICE, VIDEO &amp; MULTIMEDIA SERVICE , vol. 1786, 19 November 1992 BOSTON, US, pages 48-57, XP 000444626 G. VAN DER PLAS ET AL. 'ATM over passive optical networks : system design and demonstration' see page 49, line 25 - page 50, line 7 see page 51, paragraph 2.2.2 see page 56, paragraph 3; figure 1 -----</p>	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern Application No  
PCT/GB 95/01133

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9222034	10-12-92	US-A- 5274768 EP-A- 0586584 JP-T- 6510641	28-12-93 16-03-94 24-11-94
EP-A-523874	20-01-93	AU-B- 639183 AU-A- 1817792 US-A- 5396494	15-07-93 11-03-93 07-03-95

**This Page Blank (uspto)**